


profili HE

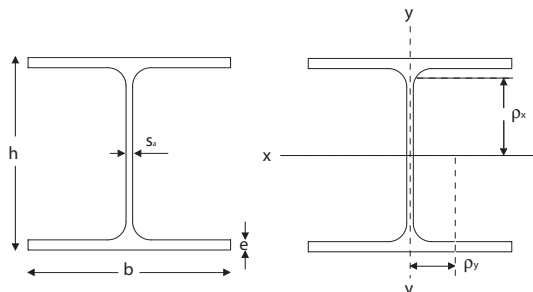

a caldo

designazione profilo ¹	dimensioni				sezione-cm ²	peso kg/m	valori statici relativi agli assi xx-yy						
	h-mm	b-mm	s _w -mm	e-mm			J _x -cm ⁴	J _y -cm ⁴	W _x -cm ³	W _y -cm ³	ρ _x -cm	ρ _y -cm	
HE 100	A	96	100	5,0	8,0	21,2	16,7	349	134	73	27	4,06	2,51
	B	100	100	6,0	10,0	26,0	20,4	450	167	90	33	4,16	2,53
	M	120	106	12,0	20,0	53,2	41,8	1143	399	190	75	4,63	2,74
HE 120	A	114	120	5,0	8,0	25,3	19,9	606	231	106	38	4,89	3,02
	B	120	120	6,5	11,0	34,0	26,7	864	318	144	53	5,04	3,06
	M	140	126	12,5	21,0	66,4	52,1	2018	703	288	112	5,51	3,25
HE 140	A	133	140	5,5	8,5	31,4	24,7	1033	389	155	56	5,73	3,52
	B	140	140	7,0	12,0	43,0	33,7	1509	550	216	79	5,93	3,58
	M	160	146	13,0	22,0	80,6	63,2	3291	1144	411	157	6,39	3,77
HE 160	A	152	160	6,0	9,0	38,8	30,4	1673	616	220	77	6,57	3,98
	B	160	160	8,0	13,0	54,3	42,6	2492	889	311	111	6,78	4,05
	M	180	166	14,0	23,0	97,1	76,2	5098	1759	566	212	7,25	4,26
HE 180	A	171	180	6,0	9,5	45,3	35,5	2510	925	294	103	7,45	4,52
	B	180	180	8,5	14,0	65,3	51,2	3831	1363	426	151	7,66	4,57
	M	200	186	14,5	24,0	113,0	88,9	7483	2580	748	277	8,13	4,77
HE 200	A	190	200	6,5	10,0	53,8	42,3	3692	1336	389	134	8,28	4,98
	B	200	200	9,0	15,0	78,1	61,3	5696	2003	570	200	8,54	5,07
	M	220	206	15,0	25,0	131,0	103,0	10642	3651	967	354	9,00	5,27
HE 220	A	210	220	7,0	11,0	64,3	50,5	5410	1955	515	178	9,17	5,51
	B	220	220	9,5	16,0	91,0	71,5	8091	2843	736	258	9,43	5,59
	M	240	226	15,5	26,0	149,0	117,0	14605	5012	1220	444	9,89	5,79
HE 240	A	230	240	7,5	12,0	76,8	60,3	7763	2769	675	231	10,10	6,00
	B	240	240	10,0	17,0	106,0	83,2	11259	3923	938	327	10,30	6,08
	M	270	248	18,0	32,0	200	157,0	24289	8153	1800	657	11,00	6,39
HE 260	A	250	260	7,5	12,5	86,8	68,2	10455	3668	836	282	11,00	6,50
	B	260	260	10,0	17,5	118,0	93,0	14919	5135	1150	395	11,20	6,58
	M	290	268	18,0	32,5	240	172,0	31307	10449	2160	780	11,90	6,90
HE 280	A	270	280	8,0	13,0	97,3	76,4	13673	4763	1010	340	11,90	7,00
	B	280	280	10,5	18,0	131,0	103	19270	6595	1380	471	12,10	7,09
	M	310	288	18,5	33,0	240	189,0	39547	13163	2550	914	12,80	7,40

designazione profilo ¹	dimensioni				sezione-cm ² peso kg/m		valori statici relativi agli assi xx-yy						
	h-mm	b-mm	s _g -mm	e-mm			J _x -cm ⁴	J _y -cm ⁴	W _x -cm ³	W _y -cm ³	ρ _x -cm	ρ _y -cm	
HE 300	A	290	300	8,5	14,0	112,0	88,3	18263	6310	1260	421	12,70	7,49
	B	300	300	11,0	19,0	149,0	117,0	25166	8563	1680	571	13,00	7,58
	M	340	310	21,0	39,0	303,0	238,0	59201	19403	3480	1250	14,00	8,00
HE 320	A	310	300	9,0	15,5	124,0	97,6	22928	6985	1480	466	13,60	7,49
	B	320	300	11,5	20,5	161,0	127,0	30823	9239	1930	616	13,80	7,57
	M	359	309	21,0	40,0	312,0	245,0	68135	19709	3800	1280	14,80	7,95
HE 340	A	330	300	9,5	16,5	133,0	105,0	27693	7436	1680	496	14,40	7,46
	B	340	300	12,0	21,5	171,0	134,0	36656	9690	2160	646	14,60	7,53
	M	377	309	21,0	40,0	316,0	248,0	76372	19711	4050	1280	15,60	7,90
HE 360	A	350	300	10,0	17,5	143,0	112,0	33090	7887	1890	526	15,20	7,43
	B	360	300	12,5	22,5	181,0	142,0	43193	10141	2400	676	15,50	7,49
	M	395	308	21,0	40,0	319,0	250,0	84867	19522	4300	1270	16,30	7,83
HE 400	A	390	300	11,0	19,0	159,0	125,0	45069	8564	2310	571	16,30	7,34
	B	400	300	13,5	24,0	198,0	155,0	57680	10819	2880	721	17,10	7,40
	M	432	307	21,0	40,0	326,0	256,0	104119	19335	4820	1260	17,90	7,70
HE 450	A	440	300	11,5	21,0	178,0	140,0	63722	9465	2900	631	18,90	7,29
	B	450	300	14,0	26,6	218,0	171,0	79887	11721	3550	781	19,10	7,33
	M	478	307	21,0	40,0	335,0	263,0	131484	19339	5500	1260	19,80	7,59
HE 500	A	490	300	12,0	23,0	197,0	155,0	86975	10367	3550	691	21,00	7,24
	B	500	300	15,0	28,0	239,0	187,0	107176	12624	4290	842	21,20	7,27
	M	524	306	21,0	40,0	344,0	270,0	161929	19155	6180	1250	21,70	7,46
HE 550	A	540	300	12,5	24,0	212,0	166,0	111932	10819	4150	721	23,00	7,15
	B	550	300	16,0	29,0	254,0	199,0	136691	13077	4970	872	23,20	7,17
	M	572	306	21,0	40,0	354,0	278,0	197984	19158	6920	1250	23,60	7,35
HE 600	A	590	300	13,0	25,0	226,0	178,0	141203	11271	4790	751	25,00	7,05
	B	600	300	15,5	30,0	270,0	212,0	171041	13530	5700	902	25,20	7,08
	M	620	305	21,0	40,0	364,0	285,0	237447	18975	7660	1240	25,60	7,22

¹A = serie leggera
B = serie normale
M = serie rinforzata
N.B.: lunghezza massima
di fornitura m 21