


tubi in acciaio senza saldatura a sezione quadrata

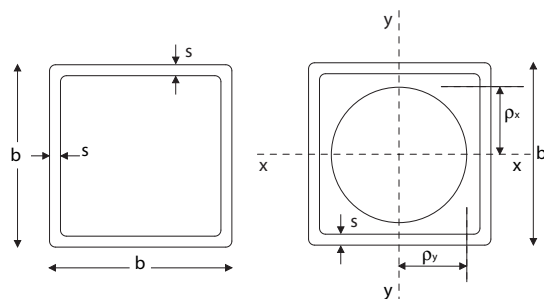

a caldo

lato esterno b-mm	spessore parete s-mm	sezione cm ²	peso kg/m	valori statici relativi agli assi xx - yy		
				$J_x = J_y$ -cm ⁴	$W_x = W_y$ -cm ³	$\rho_x = \rho_y$ -cm
40*	2,9	4,30	3,38	9,93	4,97	1,52
50*	2,9	5,46	4,29	20,30	8,11	1,93
60*	3,6	8,12	6,38	43,20	14,40	2,31
70	4,0	10,60	8,29	76,90	22,00	2,70
80	4,0	12,20	9,55	117,00	29,30	3,11
90	4,0	13,80	10,80	170,00	37,80	3,51
100	4,0	15,40	12,10	236,00	47,30	3,92
110	4,5	19,00	14,90	353,00	64,20	4,31
120	5,0	23,00	18,10	508,00	84,70	4,70
130	5,0	25,00	19,60	652,00	100,00	5,11
140	5,4	29,10	22,80	879,00	126,00	5,50
150	5,4	31,20	24,50	1090,00	145,00	5,91
160	7,1	43,40	34,10	1696,00	212,00	6,25

*S < 4 mm; valgono le norme CNR-UNI 10022/74 (formati a freddo).