


tubi in acciaio senza saldatura a sezione rettangolare

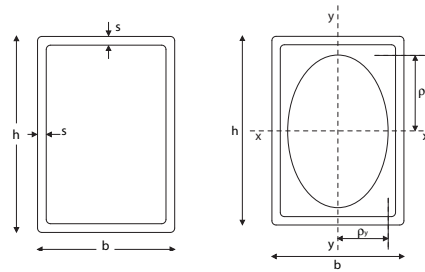

lati esterni h x b-mm	spessore parete s-mm	sezione cm ²	peso kg/m	valori statici relativi agli assi xx-yy					
				J _x -cm ⁴	J _y -cm ⁴	W _x -cm ³	W _y -cm ³	ρ _x -cm	ρ _y -cm
60 x 42*	2,9	5,58	4,38	27,6	15,6	9,19	7,44	2,22	1,67
70 x 49*	3,6	8,05	6,32	53,8	30,4	15,40	12,40	2,58	1,94
80 x 56	4,0	10,20	8,04	89,6	50,7	22,40	18,10	2,96	2,23
90 x 63	4,0	11,60	9,11	130,0	73,8	28,90	23,40	3,35	2,52
100 x 70	4,5	14,50	11,40	200,0	114,0	40,10	32,50	3,72	2,80
120 x 84	4,5	17,60	13,80	355,0	202,0	59,10	48,20	4,50	3,40
140 x 98	5,0	22,80	17,90	630,0	360,0	90,00	73,40	5,26	3,97
160 x 112	5,4	28,20	22,10	1022,0	585,0	128,00	104,00	6,02	4,55
180 x 126	5,9	34,70	27,30	1595,0	913,0	177,00	145,00	6,78	5,13
200 x 140	7,1	46,30	36,30	2609,0	1491,0	261,00	213,00	7,51	5,68
220 x 154	7,1	51,10	40,10	3510,0	2010,0	319,00	261,00	8,29	6,27
240 x 168	7,1	55,90	43,90	4598,0	2638,0	383,00	314,00	9,07	6,87
260 x 182	8,0	68,20	53,50	6562,0	3761,0	505,00	413,00	9,81	7,43
280 x 196	8,0	73,60	57,80	8255,0	4739,0	590,00	484,00	10,60	8,02
300 x 210	10,0	98,00	76,90	12493,0	7148,0	833,00	681,00	11,30	8,54
320 x 224	10,0	105,00	82,30	15267,0	8748,0	954,00	781,00	12,10	9,14
340 x 238	10,0	112,00	87,60	18424,0	10570,0	1084,00	888,00	12,80	9,73
360 x 252	10,0	118,00	92,20	21990,0	12629,0	1222,00	1002,00	13,60	10,30
380 x 266	10,0	125,00	98,30	25988,0	14939,0	1368,00	1123,00	14,40	10,90
400 x 280	10,0	132,00	104,00	30444,0	17516,0	1522,00	1251,00	15,20	11,50

* S < 4 mm; valgono le norme CNR-UNI 10022/74 (formati a freddo).