


profili saldati a sezione scatolare quadrata

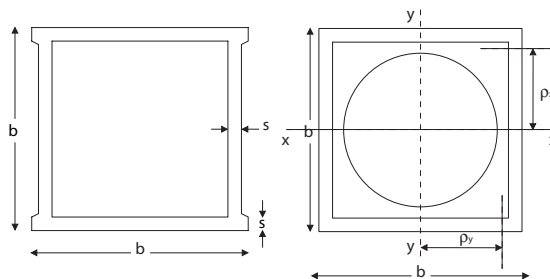

370
a caldo

profilo mm	sezione-cm ²	peso teorico-kg/m	sezione teorica $J_x = J_y$ -cm ⁴	$W_x = W_y$ -cm ³	$p_x = p_y$ -cm
300 x 300 x 10	116	91	16279	1085	11,86
20	224	176	29419	1961	11,46
30	324	254	39852	2657	11,09
40	416	326	47979	3198	10,74
50	500	392	54167	3611	10,41
60	576	452	58752	3917	10,10
400 x 400 x 10	156	122	39572	1979	15,93
20	304	239	73365	3668	15,53
30	444	348	101972	5099	15,15
40	576	452	125952	6298	14,79
50	700	549	145833	7292	14,43
60	816	640	162112	8106	14,09
500 x 500 x 10	196	154	78465	3139	20,01
20	384	301	147712	5908	19,61
30	564	443	208492	8340	19,23
40	736	578	261525	10461	18,85
50	900	706	307500	12300	18,48
60	1056	829	347072	13883	18,13
600 x 600 x 10	236	185	136959	4565	24,09
20	464	364	260459	8682	23,69
30	684	537	371412	12390	23,30
40	896	703	470699	15690	22,92
50	1100	863	559167	18639	22,55
60	1296	1017	637632	21254	22,18