

Factsheet PORT 1.1W wall-mount



Technical Details

Physical Dimensions (WxHxD)	126.5 x 284 x 77 mm (4.98 x 11.18 x 3.03 inch)
Screen	7.4" Display, 480 x 800 pixel, touch panel
Back-light and standby-mode	LED incl. lifetime extensions by adaptation to ambient light level
Energy Consumption	max. 6 W per PORT
Range of Application	0–50 °C (32–122 °F), for internal use only
Standby mode	yes, due to proximity sensor (passive infrared)
Supply	either 24/48 VDC or Power over Ethernet (IEEE 802.3af)
Card Reader Frequency	13.56 MHz
Card Reader Protocols	ISO14443A, ISO14443B-2B, ISO14443B-3B, ISO15693
Standard card types	Mifare Classic, Mifare Ultra Light, Mifare 1K, Mifare 4K (all other cards have to be pre-qualified by our test service center before use!)

PORT 1.1W wall-mount






Silver



Pearl white



Black matt

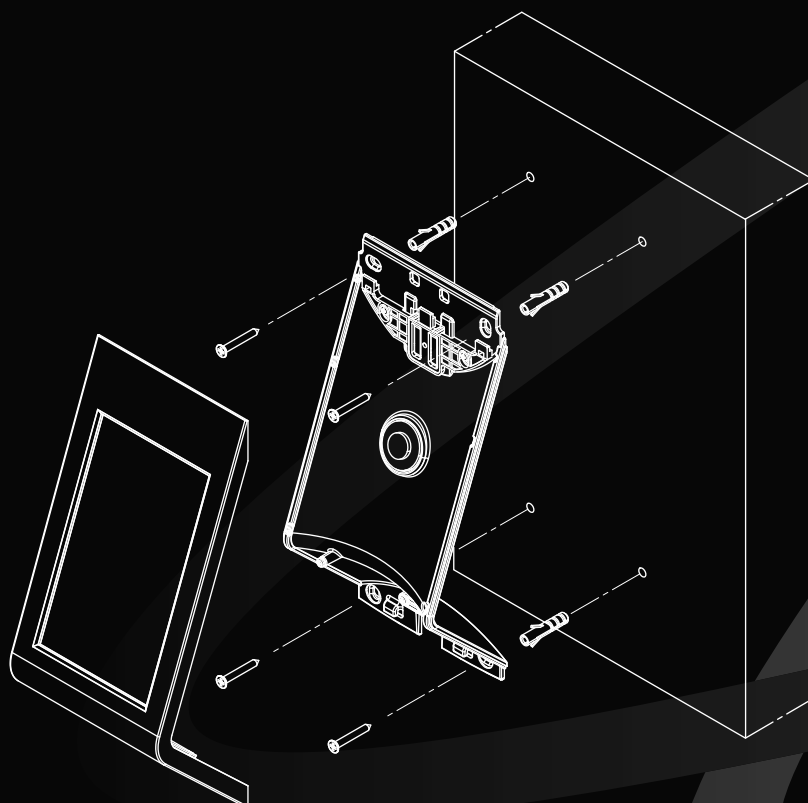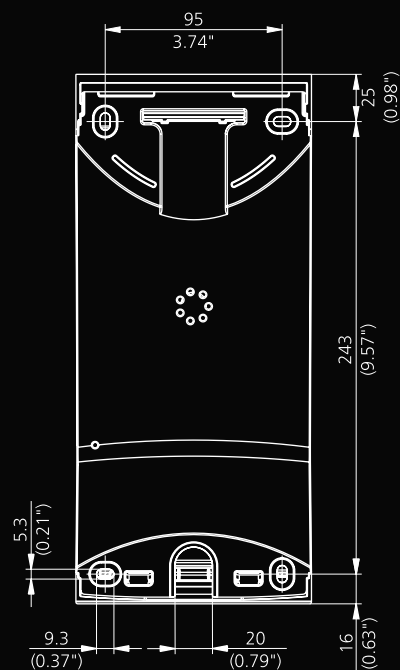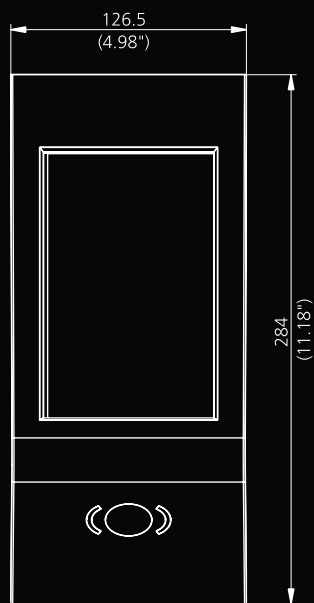

For further information including location of the Schindler office nearest you, please visit:
www.schindler.com

Schindler Elevator Ltd.
 Zugerstrasse 13
 CH-6030 Ebikon
 Switzerland
 Phone +41 (0)41 445 31 31
 Fax +41 (0)41 445 52 97

SchindlerID@ch.schindler.com
www.schindler.com