



RESSTENDE®

Nuovi stili di vita, nuovi sistemi di tende

Sunscreen Satiné 5500

Sunscreen Satiné 5500


IT **Composizione:** 42% Fibra di vetro 58% PVC - **Colori:** 18 - **Altezza tessuto:** 220/250 cm (su richiesta altezze 160/190/285 cm) - **Spessore:** 0,75 mm \pm 5 % - **Peso:** 525 g/m² \pm 5% - **Resistenza alla luce:** 7/8 **Stabilità dimensionale:** buona - **Tossicità:** nulla - **Classe di reazione al fuoco:** C1 (IT) - M1 (F) - B1 (D) - BS (GB) - **Manutenzione:** pulire con una spugna o una spazzola, imbevute di acqua e sapone.
* Non disponibile in altezza: 285 cm.

GB **Composition:** 42% Fiberglass 58% PVC - **Colours:** 18 - **Width:** 220/250 cm (other widths upon request: 160/190/285 cm) - **Thickness:** 0.75 mm \pm 5 % - **Weight:** 525 g/m² \pm 5% - **Lightfastness:** 7/8 - **Dimensional stability:** good - **Toxicity:** non-toxic **Fire retardant class:** C1 (IT) - M1 (F) - B1 (D) - BS (GB)- **Maintenance:** clean with soap and water using a sponge or brush.
* Roll width 285 cm NOT available.

Valori di isolamento dalla luce e dal calore

Protection values against light and heat

Cod. 1006	Lato/Side	Rs	As	Fattore apertura Opening factor
	A (scuro/dark)	19	72	4%
	B	26	65	

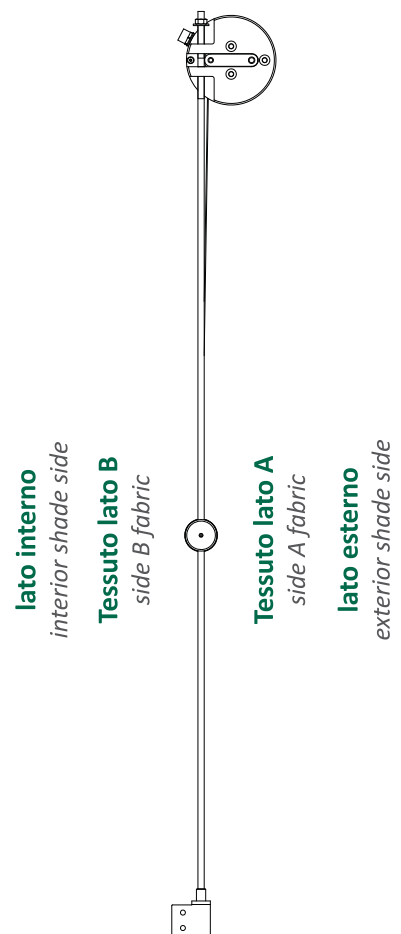

Legenda/Legend

Rs Riflessione solare
Solar reflection

As Assorbimento solare
Solar absorption



Filtrante
Shading



Ignifugo
Flame retardant



Per uso interno
For internal use



Per uso esterno
For external use



zip Zip



Guidato rivettato
Guided: fabric with press studs



Guidato steccato
Guided: fabric with reinforcement rods



Nastro laterale
Lateral tape



Senza guida o fuori guida
Without guide rail or out of the guide rail




Giuntato
Welded seams



RESSTENDE®

Sunscreen Satiné 5500

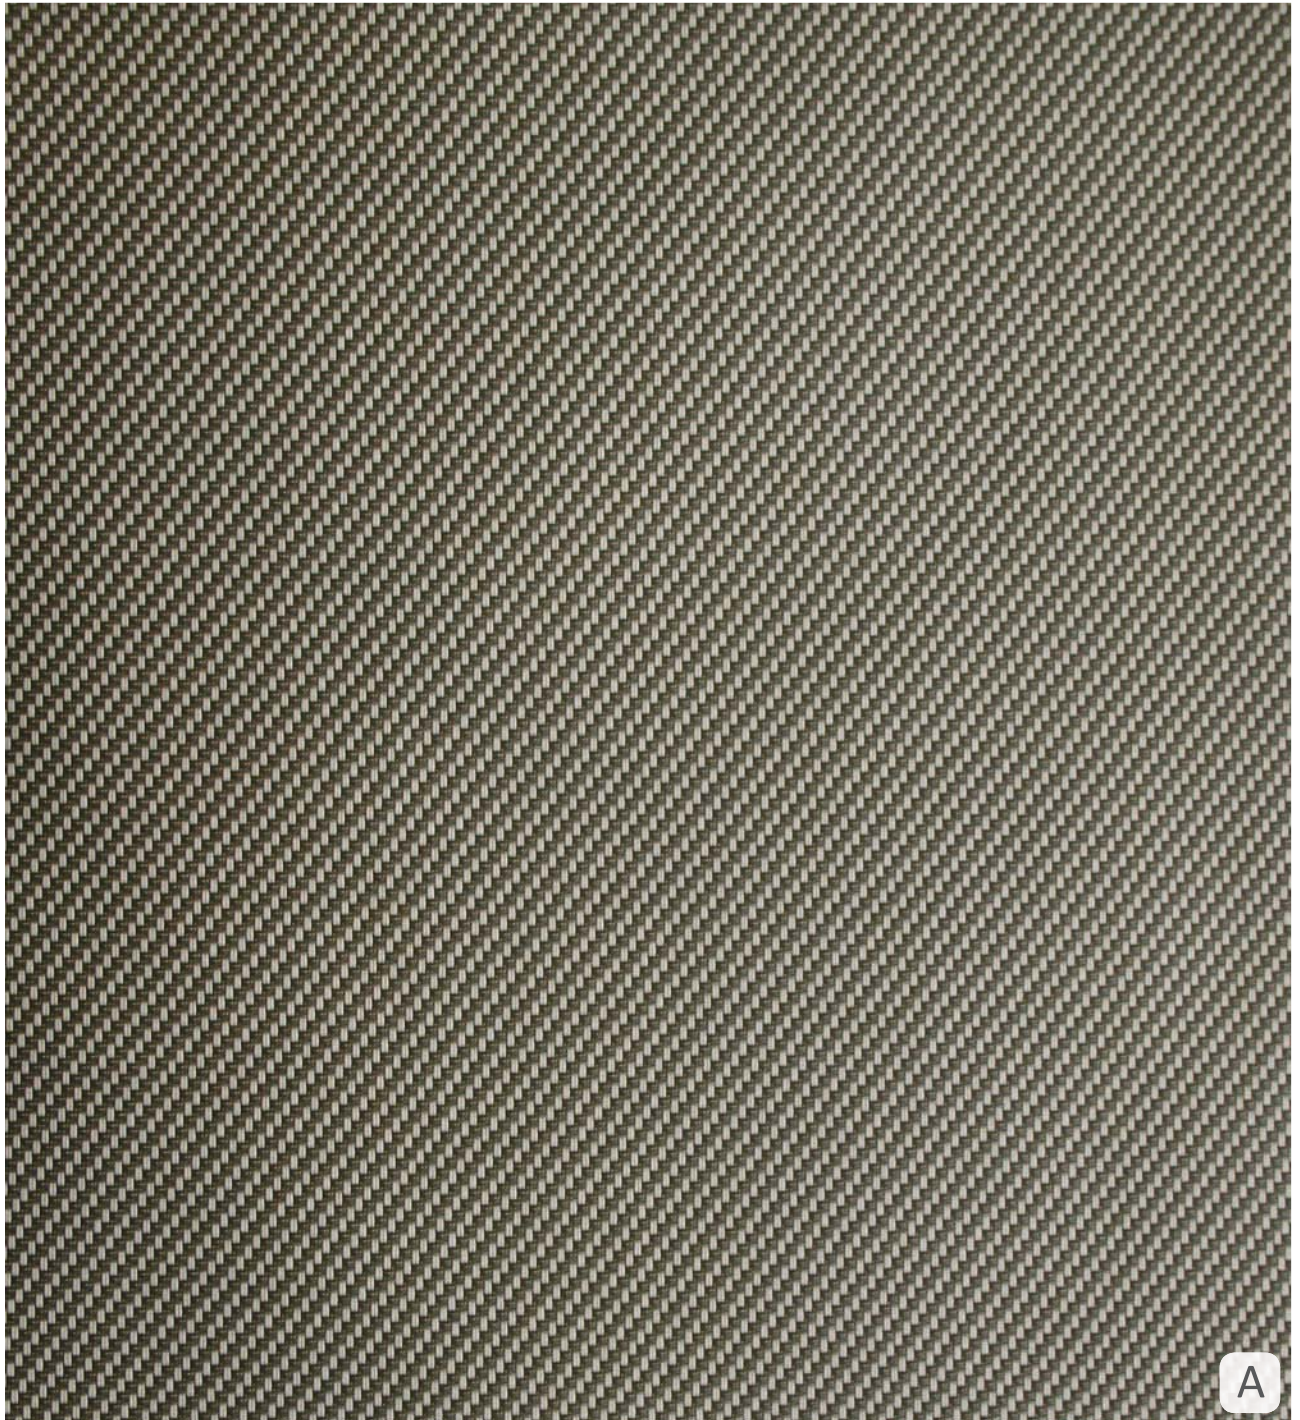

retro/back



